



Lighting Catalogue 2024



www.aaled.ca
416-493-6888
orderdesk@aaled.ca

616-618-620 Gordon Baker Rd,
Toronto, Ontario, Canada, M2H 3B4

AA-500812UCCTW3-DC12V

LED Flat Panel

The Elakeview LED Panel Light provides sleek aluminum housing. It has universal power input from AC120-347, field CCT/Wattage Selectable features that satisfies all high quality required interior light projects.



LED Interior Lighting
Flat Panels

Product Details

- Universal AC120-347V
- Multi-CCT
- Wattage Selectable
- Receptacle for Microwave Dimming Sensor (Sensor Sold Separately)
- Ultra-thin, Seamless Aluminum Frame
- Suitable for Damp Locations
- CRI>80
- Lifetime > 50,000 Hours
- DLC 5.1 P, UL&cUL Classified
- 7 Years Warranty. Extended Warranty Available*



Available Accessory:
**PIR Bluetooth Sensor
AA-ANT1P4TBLE**

Product Specifications



SKU	AA-500812UCCTW3-DC12V	AA-500812UCCTW4	AA-500814UCCTW3-DC12V	AA-500814UCCTW4	AA-500816UCCTW3-DC12V	AA-500816UCCTW4
Model	PL2X2UCCTW3	PL2X2UCCTW4	PL1X4UCCTW3	PL1X4UCCTW4	PL2X4UCCTW3	PL2X4UCCTW4
DLC Product ID	PLO3QN2Z6KRN	S-4KN3T5	PLJQJD5T2GP7	S-K5466S	PLQOFSCVYJGN	S-CNF3BQ
Voltage	120-347V		120-347V		120-347V	
Wattage	25/30/40W	25/30/40W	25/30/40W	25/30/40W	30/40/50W	30/40/50W
Efficacy	114LM/W	114LM/W	112LM/W	112LM/W	115LM/W	125LM/W
Lumens	2750/3300/4400LM	3125/3750/5000LM	2750/3300/4400LM	3125/3750/5000LM	3300/4400/5500LM	3750/5000/6250LM
CCT	3500/4000/5000K		3500/4000/5000K		3500/4000/5000K	
Size	24 X 24"	24 X 24"	12 X 48"	12 X 48"	24 X 48"	24 X 48"



Accessories

AA-ANT1P4TBLE

PIR Bluetooth Sensor

Accessories Sold Separately

AA-900033U2

LED Basket Troffer

The Elakeview LED Centre Basket Troffer provides high lumen efficacy and energy savings to projects in low profile applications. This troffer light is an excellent energy efficient replacement for fluorescent fixture.



LED Interior Lighting Troffers

Product Details

- Universal AC120-347V
- Multi-CCT
- Wattage Selectable
- Receptacle for Microwave Dimming Sensor (Sensor Sold Separately)
- CR>80
- Suitable for Damp Locations
- Lifetime > 50,000 Hours
- DLC 5.1 P, UL&cUL Classified
- 7 Years Warranty. Extended Warranty Available



Available Accessory:
PIR Bluetooth Sensor
AA-ANT1P4TBLE

Product Specifications



SKU	AA-900033U	AA-900033U2	AA-900034U-LB	AA-900034U2-LB	AA-900035U	AA-900035U2
Model	TR2X2UCCTW	TR2X2UCCTW	TR2X4UCCTW	TR2X4UCCTW	TR1X4UCCTW	TR1X4UCCTW
DLC Product ID	S-TLXK4Q	S-TLXK4Q	S-CWQDKH	S-CWQDKH	S-CUP5ZD	S-CUP5ZD
Voltage	120-347V		120-347V		120-347V	
Wattage	20/25/30W	20/25/30W	34/42/50W	34/42/50W	20/25/30W	20/25/30W
Efficacy	130LM/W	130LM/W	135LM/W	135LM/W	132LM/W	132LM/W
Lumens	2600/3250/3900LM	2600/3250/3900LM	4590/5670/6750LM	4590/5670/6750LM	2640/3300/3960LM	2640/3300/3960LM
CCT	3500/4000/5000K		3500/4000/5000K		3500/4000/5000K	
Size	24 X 24"	24 X 24"	24 X 48"	24 X 48"	12 X 48"	12 X 48"



Accessories

AA-ANT1P4TBLE

PIR Bluetooth Sensor

Accessories Sold Separately

AA-900051UCCTW2

LED Linear Strip

Our LED Linear Strip Fixture is designed for surface and suspended mounting for indoor use. Its narrow strip design, sleek and modern profile work perfectly for efficient task lighting in row installations. Suitable for damp locations.



LED Interior Lighting
Linear Strips

Product Details

- Universal AC120-347V
- Multi-CCT
- Wattage Selectable
- CRI>80
- Optional Microwave Dimming Sensor (Sensors Sold Separately)
- Suitable for Damp Locations
- Lifetime > 50,000 Hours
- DLC 5.1 P, UL&cUL Classified
- 7 Years Warranty. Extended Warranty Available

Product Specifications



SKU	AA-900051UCCTW2	AA-900052UCCTW2	AA-900056UCCTW2A	AA-900059UCCTW2A	AA-900051	AA-900054
Model	ST2FUCCTW2	ST3FUCCTW2	ST4FUCCTW2	ST8FUCCTW2	ST2F20WUNV40K	ST4F18WUNV50K
DLC Product ID	S-LTLGYL	S-58M4SV	S-TU4D51	S-0MDG1P	PLM11DR9LK35	PLA2K9M6SIAV
Voltage	AC120-347V		AC120-347V		AC120-277V	
Wattage	15/20/25W	18/25/30W	34/38/45W	65/75/90W	20W	18W
Efficacy	130LM/W	130LM/W	135LM/W	135LM/W	130LM/W	132LM/W
Lumens	1950/2600/3250LM	2340/3250/3900LM	4420/4940/6126LM	8450/9750/12150LM	2600LM	2376LM
CCT	3500/4000/5000K		3500/4000/5000K		4000K	5000K
Size	24"	36"	48"	96"	24"	48"

AA-900055

LED Linear Strip

Our LED Linear Strip Fixture is designed for surface and suspended mounting for indoor use. Its narrow strip design, sleek and modern profile work perfectly for efficient task lighting in row installations. Suitable for damp locations.



LED Interior Lighting
Linear Strips



Product Details

- Universal AC120-347V
- Multi-CCT
- Wattage Selectable
- CRI>80
- Optional Microwave Dimming Sensor (Sensors Sold Separately)
- Suitable for Damp Locations
- Lifetime > 50,000 Hours
- DLC 5.1 P, UL&cUL Classified
- 7 Years Warranty. Extended Warranty Available

Product Specifications



SKU	AA-900055	AA-900058	AA-900061	AA-900062	AA-900063	AA-900064	AA-900085UCCTW
Model	ST4F35WUNV35K	ST8F38WUNV40K	ST4F32W347V40K	ST4F32W347V50K	ST8F65W347V40K	ST8F65W347V50K	WR4FTUCCTW
DLC Product ID	PLJ3GD8X9DFZ	PLDBWQMMXJKH	PLIOBYU9BJHY	PLKW2FUC5P8B	PLG6RE8JRJ6F	PLA2K9M6SIAV	S-LBXGOU
Voltage	AC120-277V		AC347V		AC347V		AC120-347V
Wattage	35W	38W	32W		65W		32/40/48W
Efficacy	130LM/W	133LM/W	132LM/W	134LM/W	132LM/W	134LM/W	123LM/W
Lumens	4585LM	5054LM	4224LM	4288LM	8580LM	8710LM	3936/4920/5904LM
CCT	3500K	4000K	4000K	5000K	4000K	5000K	3500/4000/5000K
Size	48"	96"	48"		96"		48"

LED Architectural Strip

The Elakeview Venus Direct/Indirect Architectural Strips offer a modern appearance with a sleek extruded aluminum housing. Symmetrical light distribution illuminates surfaces with a diffused lens, making it ideal for commercial, retail, healthcare and education applications. Available in wall mount, surface mount and pendant mounting options. Strips can be daisy chained with L, X or T connectors or installed separately.



LED Interior Lighting Architectural Strip (Black/White)



Product Details

- Universal AC120-347V
- Multi-CCT
- Wattage Selectable
- CRI>80
- 0-10 V Continuous Dimming
- Suitable for Damp Locations
- Lifetime > 100,000 Hours
- DLC 5.1 P, UL&cUL Classified
- 7 Years Warranty. Extended Warranty Available

Product Specifications



SKU	AA-900081UCCTW-DI-B	AA-900082UCCTW-D-B	AA-900083UCCTW-DI-B	AA-900084UCCTW-D-B
Model	AL4FTUCCTW-DI-B	AL4FTUCCTW-D-B	AL8FTUCCTW-DI-B	AL8FTUCCTW-D-B
DLC Product ID	S-TEY07Q	S-RKHC9N	S-RZ64DW	S-DBA3J5
Voltage	120-347V		120-347V	
Wattage	35/40/45W	35/40/45W	60/75/90W	60/75/90W
Efficacy	115LM/W	115LM/W	113LM/W	113LM/W
Lumens	4550/5200/5850LM	4550/5200/5850LM	8450/9750/11700LM	8450/9750/11700LM
CCT	3000/3500/4000K		3000/3500/4000K	
Size	48"	48"	96"	96"

LED Architectural Strip

The Elakeview Venus Direct/Indirect Architectural Strips offer a modern appearance with a sleek extruded aluminum housing. Symmetrical light distribution illuminates surfaces with a diffused lens, making it ideal for commercial, retail, healthcare and education applications. Available in wall mount, surface mount and pendant mounting options. Strips can be daisy chained with L, X or T connectors or installed separately.



LED Interior Lighting Architectural Strip (Black/White)



Product Details

- Universal AC120-347V
- Multi-CCT
- Wattage Selectable
- CRI>80
- 0-10 V Continuous Dimming
- Suitable for Damp Locations
- Lifetime > 100,000 Hours
- DLC 5.1 P, UL&cUL Classified
- 7 Years Warranty. Extended Warranty Available

Product Specifications

SKU	AA-900081UCCTW-DI-W	AA-900082UCCTW-D-W	AA-900083UCCTW-DI-W	AA-900084UCCTW-D-W
Model	AL4FTUCCTW-DI-W	AL4FTUCCTW-D-W	AL8FTUCCTW-DI-W	AL8FTUCCTW-D-W
DLC Product ID	S-TEY07Q	S-278E19	S-RZ64DW	S-6ISUMR
Voltage	120-347V		120-347V	
Wattage	35/40/45W	35/40/45W	60/75/90W	60/75/90W
Efficacy	115LM/W	115LM/W	113LM/W	113LM/W
Lumens	4550/5200/5850LM	4550/5200/5850LM	8450/9750/11700LM	8450/9750/11700LM
CCT	3000/3500/4000K		3000/3500/4000K	
Size	48"	48"	96"	96"

AA-900075UCCTW

LED Linear High Bay

The Elakeview LED Linear Highbay provides high lumen efficacy and energy savings to projects in high ceiling applications. Available with multi-voltage, 3CCT switching, the LHB series deliver low maintenance fixtures with high quality optical lens for maximum energy saving.



LED Interior Lighting
Linear High Bays



Product Details

- Universal AC120-347V
- Multi-CCT
- Wattage Selectable
- CRI>80
- 2 X Mounting Hooks
- Receptacle for Microwave Dimming Sensor (Sensors Sold Separately)
- Suitable for Damp Locations
- Lifetime > 100,000 Hours
- DLC 5.1 P, UL&cUL Classified
- 7 Years Warranty. Extended Warranty Available



Available Accessory:
**PIR Motion Sensor
AA-ANT-4D**

Product Specifications



SKU	AA-900073UCCTW	AA-900075UCCTW	AA-900077UCCTW	AA-900076U	AA-900079U
Model	LHBSL92WUCCTW	LHBSL155WUCCTW	LHBSL230WUCCTW	LHBSL160W4KF120347V	LHBSL320W5KF120347V
DLC Product ID	S-UZ7NKY	S-OJLH1G	S-ONGXQE	S-C9Z7E2	S-OPXNMR
Voltage		120-347V		120-347V	
Wattage	78/92/115W	135/155/185W	200/230/270W	160W	320W
Efficacy	155LM/W	155LM/W	155LM/W	137LM/W	140LMW
Lumens	11700/13650/17250LM	20250/23250/27750LM	30000/34500/40500LM	22000LM	44645LM
CCT	4000/5000K	4000/5000K	4000/5000K	4000K	5000K
Size	16.8"	22.8"	31.2"	24"	48"



Accessories

AA-ANT-4D

PIR Motion Sensor

Accessories Sold Separately

AA-900075UCCTW

LED Linear High Bay


The Elakeview LED Linear Highbay provides high lumen efficacy and energy savings to projects in high ceiling applications. Available with multi-voltage, 3CCT switching, the LHB series deliver low maintenance fixtures with high quality optical lens for maximum energy saving.



LED Interior Lighting
Linear High Bays

Product Details

- Universal AC120-347V
- Multi-CCT
- Wattage Selectable
- CRI>80
- 2 X Mounting Hooks
- Receptacle for Microwave Dimming Sensor (Sensors Sold Separately)
- Suitable for Damp Locations
- Lifetime > 100,000 Hours
- DLC 5.1 P, UL&cUL Classified
- 7 Years Warranty. Extended Warranty Available

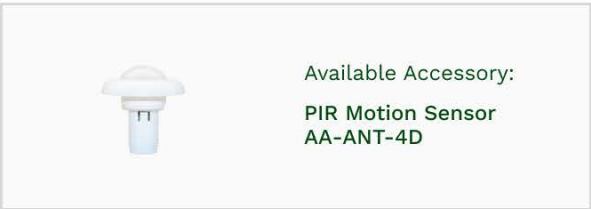

Available Accessory:
**PIR Motion Sensor
AA-ANT-4D**

Product Specifications



SKU	AA-900031U	AA-900025U-DC12V	AA-900073U	AA-900074U	AA-900075U
Model	AALHBP105W4KF120347V	AALHBP155W5KF120347V	LHBSL110W5KF120347V	LHBSL110W4KF120347V	LHBSL160W5KF120347V
DLC Product ID	PLRZN9G615NL	P8VRB2AM	S-91583W	S-04U8VX	S-EU96P0
Voltage	120-347V		120-347V		
Wattage	105W	155W	110W	110W	160W
Efficacy	135LM/W	136LM/W	140LM/W	135LM/W	140LM/W
Lumens	14175LM	21102LM	15659LM	15209LM	22474LM
CCT	4000K	5000K	5000K	4000K	5000K
Size	24"	24"	24"	24"	24"



Accessories

AA-ANT-4D	PIR Motion Sensor	Accessories Sold Separately
-----------	-------------------	-----------------------------

LED Vapor Tight

The Elakeview LED Vapor Proof is designed for environments Works perfectly for all commercial and industrial applications where weather and/or dust resistant lighting application is required.



LED Interior Lighting Vapour Tights



Product Details

- Universal AC120-347V
- Multi-CCT
- Wattage Selectable
- Class 2; 0-10V Dimming Driver; 4/6K Surge Protector
- CR>80
- 2 X Mounting Hooks Included
- Tool-less Hinged Bottom
- Receptacle for Microwave Dimming Sensor (Sensors Sold Separately)
- Optional Pendant Mount
- Long Rated Lifetime > 100,000 Hours (L70)
- DLC 5.1 P, cUL Listed, IP67, NSF, NEMA 4X and IK10-Rated
- 10 Years Warranty

Available Accessory:



**Microwave Dimming
Sensor f/ 900033/34/35U
AA-SENMW-ANT9C**

Product Specifications



SKU	AA-900015UCCTW2FT	AA-900015UCCTW4FTA	AA-900015UCCTW8FTA	AA-900015UCCTW4FT2A	AA-900015UCCTW8FT2A	AA-900077UCCTWVP2
Model	VP2FTUCCTW	VP4FTUCCTW	VP8FTUCCTW	VP4FTUCCTW2	VP8FTUCCTW2	LHBVP155WUCCTW
DLC Product ID	S-ECM09R	S-7KML5V	S-680N2L	S-6R88V0	S-Z5X2RG	S-0NGXQE
Voltage	120-347V			120-347V		120-347V
Wattage	15/20/25W	34/38/45W	65/75/90W	26/35/45W	65/75/90W	155/185/200W
Efficacy	140LM/W	130LM/W	130LM/W	140LM/W		160LM/W
Lumens	2340/3250/3900LM	4420/4940/5850LM	8450/9750/11700LM	3640/4900/6390LM	9100/10500/12870LM	24800/29600/32000LM
CCT	3500/4000/5000K			3500/4000/5000K		3500/4000/5000K
Size	24"	48"	96"	48"	96"	48"



Accessories

AA-SENMW-ANT9C

Microwave Dimming Sensor f/ 900033/34/35U

Accessories Sold Separately

900045UCCTW

LED UFO High Bay

The Elakeview LED UFO Highbay is designed for commercial and industrial applications requiring dustproof and waterproof lighting fixtures. Its stylish design and modern profile work perfectly for high/low bay lighting.



Product Details

- Universal AC120-347V
- Multi-CCT
- Wattage Selectable CRI>80
- Receptacle for Microwave Dimming Sensor (Sensor Sold Separately)
- Fully Weather Proof IP65, Resistant to Vibration
- 90 Degree Reflector Available
- DLC 5.1 P, UL&cUL Classified
- 7 Years Warranty. Extended Warranty Available



Product Specifications



SKU	AA-900041U	AA-900045U	AA-900045UCCTW	AA-900067UCCTW	AA-900045UCCTW-WHITE	AA-900067UCCTW-WHITE
Model	HBU100W120347V50K	HBU150W120347V50K	HBU150WUCCTW	HBU240WUCCTW	HBU150WUCCTW2	HBU240WUCCTW
DLC Product ID	S-KZOCVH	S-A9TZLD	S-A5J2DF	S-906V3J	S-YT0X68	S-906V3J
Voltage	120-347V		120-347V		120-347V	
Wattage	100W	150W	90/120/150W	140/190/240W	85/120/150W	140/190/240W
Efficacy	155LM/W	140LM/W	150LM/W	145LM/W	150LM/W	145LM/W
Lumens	16000LM	21000LM	13500/18000/22500LM	20300/27550/34800LM	12325/17400/21750LM	20300/27550/34800LM
CCT	5000K	5000K	3000/4000/5000K		3500/4000/5000K	
Size	13 X 6.3"	13 X 6.3"	11 X 7"	11 X 7"	11 X 7"	11 X 7"

Accessories



AA-ANT-5-4T	Bi-level Microwave Sensor for UFO High Bay	Accessories Sold Separately
-------------	--	-----------------------------

AA-900086CCT-BL

LED Flush Mount/Vanity

The Elakeview LED Flush Mount and LED Vanity Light offer excellent energy-saving and seamless lighting performance. Their modern and compact design work perfectly for commercial and residential applications.



LED Interior Lighting
Flush Mount/Vanity



Product Details

- 5 CCT Selectable
- CRI>80
- Power Factor > 0.9
- Metallic Black Finish
- Built-in Microwave Dimming Sensor
- Remote Control Functions
- Easy to Install and Operate
- Energy Star, cETL Listed
- 7 Years Warranty

Product Specifications



SKU	AA-900086CCT-BL	AA-900088CCT-BL	AA-900087CCT-BN	AA-900089CCT-BN	AA-900090CCT
Model	FM16IN35WCCT	FM12IN18WCCT	FM16IN35WCCT	FM12IN18WCCT	VN2F25WCCT
Energy Star ID	2485668	2485667	2485668	2485667	2485666
Voltage	AC120V		AC120V		AC120V
Wattage	35W	18W	35W	18W	25W
Efficacy	80LM/W	80LM/W	80LM/W	80LM/W	80LM/W
Lumens	2800LM	1440LM	2800LM	1440LM	2000LM
CCT	2700/3000/3500/4000/5000K		2700/3000/3500/4000/5000K		3000/4000/5000K
Size	16"	12"	16"	12"	24"


AA-500825SU-5CCT

LED Slim Panel

The Elakeview LED Slim Panel offers multi-CCT feature that allows easy ambiance adjustment to match your preference. The sleek design and white finish seamlessly blend with any decor.



LED Interior Lighting
Round Slim Panel

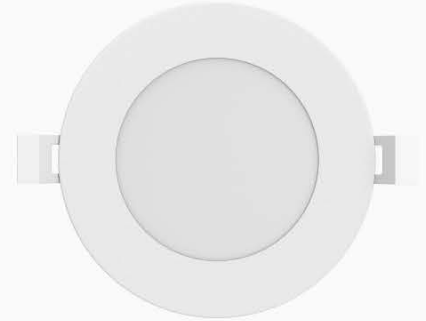

Product Details

- Universal AC120-347V
- 5 Multi-CCT
- Wattage Selectable
- Flicker-Free
- FT4-Rated Cable
- Triac Dimming at 120V, 0-10V Dimming at 120-347V
- Suitable for direct contact with insulation, IC-rated, and Air-Tight
- Certified for Use in Damp Locations
- Long Rated Lifetime > 50,000 Hours (L70)
- Energy Star Listed
- 5 Years Warranty

Product Specifications



SKU	AA-500825SU-5CCT	AA-500821SU-5CCT	AA-500829SU-5CCT
Model	RP4IN8WUCCT	RP6IN12WUCCT	RP8IN16WUCCT
Energy Star #	3439029	3439039	3439038
Voltage	120-347V	120-347V	120-347V
Wattage	8W	12W	16W
Lumens	750LM	1100LM	1100LM
CCT	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K
Size	4"	6"	8"

AA-500820

LED Down Light

The Elakeview LED Downlight is a commercial grade downlight fixture. This Energy Star qualified LED light features AC120V and easy installation for commercial space.



LED Interior Lighting
LED Down Light



Product Details

- AC120V
- Eco-Friendly, Mercury-Free
- No UV & Noise
- Flicker-Free
- Fully Dimmable
- Shatterproof
- Suitable for 5" & 6" can
- Approved for Use in Damp Locations
- Long Rated Lifetime > 50,000 Hours (L70)
- Energy Star Listed
- 5 Years Warranty



Product Specifications

SKU	AA-500820	AA-500821	AA-500822	AA-500824	AA-500825	AA-500826
Model	D416-3000K	D416-4000K	D416-5000K	D404-3000K	D404-4000K	D404-5000K
Energy Star #	2261351	2339632	2261353	S-906V3J	S-YTOX68	S-906V3J
Voltage	AC120V			AC120V		
Wattage	12W	12W	12W	9W	9W	10W
CRI	>90	>90	>90	>90	>90	>90
Lumens	1100LM	1100LM	1100LM	650LM	700LM	800LM
CCT	3000K		5000K	3000K	4000K	5000K
Size	6"	5/6"	5/6"	4"	4"	4"

AA-600622UCCT

LED Tube T8/T5 Type B

The new LED Type B bypass T5/T8 developed with multi CCT selectable with universal input voltage of AC120-347V feature that satisfies all high quality required interior lighting projects.



LED Interior Lighting
LED T8/T5 Type B Tube



Product Details

- Universal AC120-347V
- CRI>80
- Multi-CCT
- Single & Double End Input
- Triac Dimming at 120V
- No UV, Flickering-Free; Shatterproof
- Suitable for Damp Locations
- Lifetime > 50,000 Hours
- DLC 5.1 P, UL&cUL Classified
- 5 Years Warranty. Extended Warranty Available

Product Specifications

SKU	AA-600602UCCT	AA-600618UCCT	AA-600622UCCT
Model	CH1172HT-36-12W 83550-07	CH1172HT-48-15W 83550-07	CH1172HT-48-11.5W 83550-07
DLC Product ID	S-PB2DHM	S-RZ64DW	S-6ISUMR
Voltage	120-347V		
Wattage	12W	15W	11.5W
Efficacy	120LM/W	140LM/W	152LM/W
Lumens	1500-1600LM	2000-2200LMLM	1650-1800LM
CCT	3500/4000/5000K		
Size	36"	48"	48"

AA-600622UCCT

LED Tube T8/T5 Type B

The new LED Type B bypass T5/T8 developed with multi CCT selectable with universal input voltage of AC120-347V feature that satisfies all high quality required interior lighting projects.



LED Interior Lighting
LED T8/T5 Type B Tube



Product Details

- Universal AC120-347V
- CRI>80
- Multi-CCT
- Single & Double End Input
- Triac Dimming at 120V
- No UV, Flickering-Free; Shatterproof
- Suitable for Damp Locations
- Lifetime > 50,000 Hours
- DLC 5.1 P, UL&cUL Classified
- 5 Years Warranty. Extended Warranty Available

Product Specifications

SKU	AA-600054U-TypeB	AA-600619	AA-600621
Model	CH1192H-46-25W 850-1	KK-T8-4DW-18-5X1B	KK-T8-4EW-15-5X1B
DLC Product ID	S-NP210V	S-RZ64DW	S-6ISUMR
Voltage	AC110-277V	AC110-277V	AC110-277V
Wattage	25W	18W	15W
Efficacy	140LM/W	120LM/W	150LM/W
Lumens	3400LM	2200LM	1800LM
CCT		4000K	
Size	48"	48"	48"

AA-600033-SP

LED Tube T8/T5 Type A

The new LED Type A T8 directly replaces traditional fluorescent T8 tubes, providing instant, flicker-free illumination with lower energy cost. It is compatible with instant ballasts or programmed start ballasts.



LED Interior Lighting
LED T8/T5 Type A Ballast Compatible



Product Details

- AC100-277/347V Depends on the Ballast
- CRI>80
- Color Temperature: 5000K
- High Lumen Efficiency
- Compatible with Instant & Programmed Start Ballast
- Work with IS+PS+RS+EM
- Lifetime > 50,000 Hours
- DLC 5.1 P, UL&cUL Classified
- 5 Years Warranty. Extended Warranty Available

Product Specifications



SKU	AA-600033-SP	AA-600034	AA-600036-SP
Model	T8U-IDDM13-1800-L-CBA	KK-T8-4EW-14-5AAD	T8U-IDDM13-2200-L-CBA
DLC Product ID	P56Q4FK9	PD182D6R	PAQMGB7
Voltage	Works with AC110/277/347/480V Electronic Ballasts		
Wattage	11.5W	14.5W	15W
Efficacy	124LM/W	134LM/W	122LM/W
Lumens	1800LM	1941LM	2200LM
CCT	4000K	5000K	4000K
Size	48"	48"	48"

AA-600037-SP

LED Tube T8/T5 Type A

The new LED Type A T8 directly replaces traditional fluorescent T8 tubes, providing instant, flicker-free illumination with lower energy cost. It is compatible with instant ballasts or programmed start ballasts.



LED Interior Lighting
LED T8/T5 Type A Ballast Compatible



Product Details

- AC100-277/347V Depends on the Ballast
- CRI>80
- Color Temperature: 5000K
- High Lumen Efficiency
- Compatible with Instant & Programmed Start Ballast
- Work with IS+PS+RS+EM
- Lifetime > 50,000 Hours
- DLC 5.1 P, UL&cUL Classified
- 5 Years Warranty. Extended Warranty Available

Product Specifications



SKU	AA-600037-SP	AA-600043	AA-600040
Model	T8U-IDDM13-2200-L-EBA	T8L-IDDM13-1450-3ft-EBA-90	T8L-IDDM13-1250-2ft-ECA-91
DLC Product ID	P5SPFY74	PQ6K0AU3	PQ6K0AU3
Voltage	Works with AC110/277/347/480V Electronic Ballasts		
Wattage	15W	12W	9W
Efficacy	122LM/W	121LM/W	120LM/W
Lumens	2200LM	1450LM	1150LM
CCT	5000K	5000K	5000K
Size	48"	36"	24"

AA-700035UCCTW

LED Canopy

The Elakeview LED slim round canopy offers a highly efficient solution for various lighting needs. With universal power input ranging from AC 120-347V, it caters to a wide range of commercial and industrial applications. Additionally, it features a 3CCT solution, ensuring versatility and adaptability in lighting design.



LED Interior Lighting Canopy



Product Details

- Universal AC120-347V
- Multi-CCT
- Wattage Selectable
- CRI>80
- Microwave Motion & Photocell Sensor/ Emergency Battery Backup Optional
- Unique Design with Strong Extruded Lamp Body
- Long Rated Lifetime > 50,000 Hours (L70)
- DLC 5.1 P, cETL Classified
- 7 Years Warranty. Extended Warranty Available

Product Specifications



SKU	AA-700034H	AA-700034-4K	AA-700034N	AA-700035-4k	AA-700035H-4K	AA-700035UCCTW
Model	CP40WUNV50K	CP40WUNV40K	CP40WUNV50K	CP70WUNV40K	CP70W34740K	CP02A-75MW-50KMC-MV-D-V40
DLC Product ID	PLY7IYUAP51W	PLGI2OHDTSQ2	PLY7IYUAP51W	PL4I8M1CIS8I	PL9IDSM9CIYK	S-YHRNQ4
Voltage	120-347V			120-347V		120-347V
Wattage	45W	40W	40W	70W	70W	40/50/60/75W
Efficacy	134LM/W	130LM/W	134LM/W	130LM/W	120LM/W	135LM/W
Lumens	5255LM	5092LM	4800LM	8400LM	8400LM	6750/8100/10,800/13,500LM
CCT	5000K	4000K	5000K	4000K	4000K	3000/4000/5000K
Size	10 X 10 X 4.1"			10 X 10 X 4.1"		10.2 X 7.8 X 4.0"

AA-700022UCCTW

LED Wall Pack

The Elakeview LED Full Cutoff Wallpack provides high efficiency solution to replace inefficient HID wallpack. Available with multi-voltage, 3CCT switching and built-in Photocell, the WP07 series is the perfect solution for commercial and industrial applications.



LED Exterior Lighting LED Full Cutoff Wall Pack



Product Details

- Universal AC120-347V
- Multi-CCT
- Wattage Selectable
- CRI>70
- Built-in Photocell
- 90° Adjustable Angle
- High Quality Die-Casting Aluminum Shell
- Long Rated Lifetime > 70,000 Hours (L70)
- DLC 5.1 P, cETL Listed, IP66 Rated
- 10 Years Warranty

Product Specifications



SKU	AA-700020UCCTW	AA-700022UCCTW	AA-700020
Model	WPFC50WUCCT	WPFC100WUCCT	AAWP45W110V4K
DLC Product ID	WPFC50WUCCT	WPFC100WUCCT	PR815V5K
Voltage	AC120-347V	AC120-347V	AC120-277V
Wattage	20/30/40/50W	50/60/80/100W	30W
Efficacy	135LM/W	135LM/W	116LM/W
Lumens	2700/4050/5400/6750LM	6750/8100/10800/13500LM	2685LM
CCT	3000/4000/5000K	3000/4000/5000K	5000K
Size	6.69 X 8.33 X 3.94"	10.2 X 10.8 X 9.9"	7.8 X 6.22 X 4.29"

LED Wall Pack

The Elakeview LED Wallpack provides high efficiency solution to replace inefficient HID wallpack. Available with multi-voltage, 3CCT switching and built-in Photocell, the WP96 series is the perfect solution for commercial and industrial applications.



Product Details

- AC120-277V
- Multi-CCT
- Wattage Selectable
- Build-in Photocell
- CRI>80
- Perfect Size: 8.2 X 5.5 X 3.4"
- Long Rated Lifetime > 50,000 Hours (L70)
- DLC 5.1 P, ETL Listed, IP66 Rated
- 5 Years Warranty

LED Exterior Lighting LED Security Wall Pack



Product Specifications



SKU	AA-700036A-4K	AA-700036H347A	AA-700036H347A-4K	AA-700037HA-4K	AA-700037UCCTW2	AA-700043UCCTW
Model	AAWP45W110V4K	AAWP40W347V5K	AAWP40W347V4K	AAWP62W347V4KA	WP96WUCCT	WP11B-25MW-50KMC-LV
DLC Product ID	PR815V5K	PKBEXBEN	PP3Z7NJ4	PLLUEPZVRN01	S-AETWX2	PMQ2FVP3
Voltage	AC110V	AC347V	AC347V	120-347V	120-347V	120-277V
Wattage	45W	40W	40W	62W	72/96/120W	155/185/200W
Efficacy	117LM/W	118LM/W	111LM/W	134LM/W	133LM/W	134LM/W
Lumens	5223LM	4700LM	4637LM	8091LM	9807/12297/14865LM	1072/1340/2010/3350LM
CCT	4000K	5000K	4000K	4000K	3000/4000/5000K	3000/4000/5000K
Size	14.2 X 14.8 X 13"				14.3 X 7.5 X 9.2"	8.2 X 5.5 X 3.4"

AA-700015UCCTW

LED Area/Flood Light

The Elakeview Nebula LED Area Light is developed with rugged, Die-Cast aluminum housing, a built-in 6KV/10KV surge protector, and a class 2 driver. It has universal power input from AC120-347V, field CCT/wattage selectable feature, and an integrated receptacle for photocell/motion sensor that satisfies all high-quality required exterior lighting projects.



LED Exterior Lighting
LED Area/Flood Light



Product Details

- AC120-347V
- Multi-CCT
- Wattage Selectable
- CRI>70
- 6KV/10KV Surge Protector, Class2 Driver w/ Over Temperature protection
- Pressure Relief Respirator
- With Receptacle Photocell/Motion Sensor
- Aluminum die-cast housing with heat sink
- Long Rated Lifetime > 70,000 Hours
- DLC 5.1 P, cETL Listed, IP65 Rated
- 10 Years Warranty



Available Accessory:
**Photocell
ANT-54TPC**

Product Specifications



SKU	AA-700015UCCTW	AA-700056UCCTW	AA-700057UCCTW	AA-700058UCCTW	AA-700057UCCTW-WHITE
Model	AL200WUCCTW	AL100WUCCTW	AL150WUCCTW	AL300WUCCTW	AL150WUCCTW
DLC Product ID	S-5NWGS9	S-66H8RP	S-Q5HM1X	S-CNP02S	S-Q5HM1X
Voltage	AC120-347V	AC120-347V	AC120-347V	AC120-347V	AC120-347V
Wattage	150/200/240W	60/80/100W	100/120/150W	300/420W	100/120/150W
Efficacy	150LM/W	150LM/W	150LM/W	155LM/W	150LM/W
Lumens	22500/30000/36000LM	9000/12000/15000LM	15000/18000/22500LM	45000/63000LM	15000/18000/22500LM
CCT	3500/4100/5000K	3500/4100/5000K	3500/4100/5000K	3500/4100/5000K	3500/4100/5000K
Size	13 X 23.3 X 2.5"	13 X 23.3 X 2.5"	13 X 23.3 X 2.5"	24.8 X 29.7 X 2.4"	13 X 23.3 X 2.5"



Accessories

ANT-54TPC

Photocell F/ Area Light, DC12-24V

Accessories Sold Separately

AA-700027UCCTW-KM

LED Flood Light

The Elakeview LED Flood Light is constructed with a durable, sealed die-casting profile and premium heat-resisting polycarbonate optical lens. This Flood Light is designed for commercial and industrial exterior light applications.



LED Exterior Lighting
LED Flood Light



Product Details

- AC120-347V
- Multi-CCT
- Wattage Selectable
- CRI>80
- With Dusk to Dawn Photocell
- Knuckle Mount
- Aluminum die-cast housing with heat sink
- Long Rated Lifetime > 70,000 Hours
- DLC 5.1 P, cETL Listed, IP65 Rated
- 10 Years Warranty

Product Specifications



SKU	AA-700027UCCTW-KM	AA-700027UCCTW-YM	AA-700031UCCTW-KM	AA-700031UCCTW-KM	AA-700027
Model	FL45WUCCTW	FL45WUCCTW	FL95WUCCTW	FL95WUCCTW	TLFLF505YYZZ
DLC Product ID	FL45WUCCTW	FL45WUCCTW	FL95WUCCTW	FL95WUCCTW	PG6HQVGT
Voltage	AC120-347V		AC120-347V		AC100-277V
Wattage	15/25/35/45W	15/25/35/45W	50/60/75/95W	50/60/75/95W	50W
Efficacy	122/125/135LM/W		122/125/135LM/W		120LM/W
Lumens	2100/3500/4900/6300LM		7000/8400/10500/13300LM		4731LM
CCT	3000/4000/5000K		3000/4000/5000K		5000K
Size	5.5 X 4.9 X 1.7"	5.5 X 4.9 X 1.7"	11.4 X 7.5 X 2.6"	11.4 X 7.5 X 2.6"	8.9 X 7.5 X 3.7"

AA-700031HRC

LED Flood Light

The Elakeview LED Flood Light is constructed with a durable, sealed die-casting profile and premium heat-resisting polycarbonate optical lens. This Flood Light is designed for commercial and industrial exterior light applications.



LED Exterior Lighting
LED Flood Light



Product Details

- AC347-480V
- CRI>80
- Energy Savings Up to 70% VS. 400W MH
- Excellent Wind Resistance
- Preinstalled U Bracket/Trunnion Mount
- Preinstalled Receptacle for Twist-lock Photocell
- Long Rated Lifetime > 50,000 Hours
- DLC 5.1 P, cETL Listed, IP65 Rated
- 5 Years Warranty. Extended Warranty Available

Product Specifications



SKU	AA-700013RC	AA-700031RC	AA-700031HRC	AA-700031HRC-4K
Model	FL100W5K	FL150W[H]5K	FL150W[H]5K	FL150WH4K
DLC Product ID	PLK1PFVNEJ8Y	PBQ5G2Z7	PBQ5G2Z7	PL4SFUBVBE9P
Voltage	AC120-277V		AC347-480V	
Wattage	100W	150W	150W	150W
Efficacy	134LM/W	126LM/W	126LM/W	132LM/W
Lumens	13225LM	18750LM	19000LM	19819LM
CCT	5000K		5000K	4000K
Size	13.2 X 23.2 X 3.1"		13.2 X 23.2 X 3.1"	

AA-700063

LED Bollard Light

The Elakeview LED bollard light offers a smooth and modern appearance with die-cast aluminum housing. Designed to illuminate outdoor spaces like pathways, townhouses, and public areas. The bollard light is the perfect solution to enhance safety and visibility at night.



Product Details

- Universal AC120-347V
- CRI>70
- Multi-CCT
- Wattage Selectable
- Class 2 0-10V Dimming Driver, 4/6KV Surge Protector, w/Over temperature Protection
- Microwave Motion, Photocell Sensor/ Emergency Battery Backup Optional
- Round Top, 42-inch Base
- Long Rated Lifetime > 50,000 Hours (L70)
- DLC 5.1 P, cETL Listed, IP65 Rated
- 5 Years Warranty

LED Exterior Lighting LED Bollard Fixture



Product Specifications



SKU	AA-700063	AA-700064
Model	BL25WIUCCTW	BL25WIUCCTW
DLC Product ID	BL25WIUCCTW	BL25WIUCCTW
Voltage	AC120-347V	AC120-347V
Wattage	8/15/20/25W	8/15/20/25W
Efficacy	135LM/W	135LM/W
Lumens	1080/2025/2700/3375LM	1080/2025/2700/3375LM
CCT	3000/4000/5000K	3000/4000/5000K
Size	6.3 X 6.3 X 42.5"	6.3 X 6.3 X 42.5"

AA-700062

LED Post Top

Our LED Post Top Fixture is an energy-efficient lighting solution designed for outdoor spaces. Emphasizing high-quality illumination and an extended lifespan. This post top is perfect for commercial settings such as parking lots, walkways, and parks.



Product Details

- Universal AV120-347V
- CRI>80
- Energy Savings Up to 70% VS. 400W MH
- Excellent Wind Resistance
- Preinstalled U Bracket/Trunnion Mount
- Preinstalled Receptacle for Twist-lock Photocell
- Long Rated Lifetime > 50,000 Hours
- DLC 5.1 P, cETL Listed, IP65 Rated
- 5 Years Warranty. Extended Warranty Available

LED Exterior Lighting
LED Post Top Fixture



Product Specifications



SKU	AA-700062
Model	RL21A-80-40K-MV
DLC Product ID	RL21A-80-40K-MV
Voltage	AC120-347V
Wattage	80W
Lumens	10,800LM
CCT	4000K
Size	17.8 X 3 X 29.5"

FlexCharge Smart Level 2 EV charger

The FlexCharge Smart Level 2 EV Charger is a flexible and dependable all-in-one EV charging solution ideal for both indoor or outdoor commercial, residential, and retail applications



Product Details

- Provides 8x faster charging speeds than Level 1 EV chargers at a maximum output of 48A.
- RFID contactless payment for quick and efficient user interaction.
- Ideal for any indoor and outdoor applications up to -22°F – 122°F (-30°C – 50°C) with a NEMA Type 4 & IP65 rating.
- Suitable for either wall or pedestal mounting with an anchor kit.
- Dependable 4GHz Wi-Fi and Bluetooth Connection for remote charging capabilities.
- OCPP 1.6J Flexible Management Software with Remote Firmware Updates.
- Capable of withstanding 11.0 lbs (5 kg) of impact from heights of 15.8" (400 mm) without sustaining damage thanks to an IK 10 Damage Rating.
- Single and Double Sided EV Charging pedestal configurations available

Product Specifications

Input Current	48A	Tamper Resistant	IK10, except LCD & RFID
Input Voltage (Single Phase)	208-240V/ 60Hz	Cable Management	Optional
Network Connectivity	Ethernet + Wi-Fi & Bluetooth + 4G	Operating Temp	-22°F - 122°F (-30°C - 50°C)
RFID & OTA Technology	Included	Humidity	Max 95%
Plug	Tesla NACS	Metering Accuracy	+/- 1%
Number of Ports	Single	Input Protection	UVP, OVP, RCD, SPD
Charging Cable	25ft (7.6m)	Output Protection	OCP, Control Pilot Fault
OCPP 1.6, Hardwired	Yes	Internal Protection	OTP, MCU Function Fault
AC Input Connection	L/N/GND	Safety	UL2594
Max Output, 60 Hz	48A / 11.5kW	Compliance & Certification	ETL Compliant, FCC Compliant, Energy Star Certified
Dimensions (H x W x D)	12.3" x 10.2" x 4.1" (326mm x 247mm x 97mm)	Power Configurable	Built-In
Weight	13.2 lbs with Plug	LCD Display	4.3 Inch LCD Display
IP Protection	IP65 / NEMA Type 4	Warranty	3 Years

Accessories

AA-EVC48V-LV2-PD1	FlexCharge Single Sided EV Charger Stand	Accessories Sold Separately
AA-EVC48V-LV2-PD2	FlexCharge Double Sided EV Charger Stand	Accessories Sold Separately

EV Charging Smart Level 2 EV Charger



Available Accessories;
Single or Double Sided EV Charging Stands

Product Specifications



SKU	AA-SENMW-ANT54TPC	AA-HBUMCSENSOR-DC12V	AA-SENMW-ANT3A	AA-SENMW-ANT3C
Model	ANT-54TPC	ANT-5-4T	ANT-3A	ANT-3C
Description	Photocell f/ area light, DC12-24V	Bi-level Microwave Sensor for UFO High Bay	Microwave Dimming Sensor f/ 900015/85UCCTW	Microwave Dimming Sensor f/ 900056/59UCCTW2A
Associated Products	700056UCCTW, 700057UCCTW(white), 700015UCCTW, 700058UCCTW	UFO High Bays	900015UCCTW2/4/8FT, 900085UCCTW	900056UCCTW2A, 900059UCCTW2A

Product Specifications



SKU	AA-SENPIRBT-ANT1P4TBLE	AA-SENPIR-ANT4D	AA-SENMW-ANT1P4T	AA-SENMW-ANT9C
Model	ANT-1P4TBLE	ANT-4D	ANT-1P4T	ANT-9C
Description	PIR Bluetooth Sensor f/ LED Panel light, 900033/34U2	PIR Sensor f/ 900073/75/77UCCTW	PIR Sensor f/ LED Panel light, 900033/34U2	Microwave Dimming Sensor f/ 900033/34/35U
Associated Products	500812UCCTW3-DC12V, 500814UCCTW3-DC12V, 500816UCCTW3-DC12V, 900033U2, 900034U2	900073UCCTW, 900075UCCTW, 900077UCCTW	500812UCCTW3-DC12V, 500814UCCTW3-DC12V, 500816UCCTW3-DC12V, 900033U2, 900034U2	500816UCCTW2-DC, 900033U, 900034U, 900035U

Product Specifications



SKU	AA-SENPIRAC120347VD	AA-SENPIRAC120347VOF	AA-SENPIRBT-BRI819PBDBLE	AA-RC-100
Model	BRI819P-C-D	BRI819P-C-O	BRI819P-B-D-BLE	RC-100
Description	PIR Occupancy sensor AC120-347V 0-10V dimming	PIR Occupancy sensor, on/off, AC120-347V	PIR Bluetooth Sensor 0-10V dimming & Daylight harvesting	Wireless Handheld Configuration Tool
Associated Products	Any SKU with a Knockout	Any SKU with a Knockout	Any SKU with a Knockout	Works with all sensors