

LED Vapor Proof Low Bay 4FT 3.8"

SKU: AA-900015UCCTW4FTA



Description

The Elakeview LED Vapor Proof provides high lumen efficacy and energy savings to projects in high ceiling applications. This fixture is an excellent energy efficient replacement for food industry and refrigerated storage rooms.



Features

- Universal Input AC120-347V
- Multi CCT & Wattage Selectable
- Class 2; 0-10V Dimming Driver; 4/6KV Surge Protector, W/ Overtemperature Protection
- Efficacy: 132LM/W
- LM70 180,000hrs, LM80 120,000hrs
- Receptacle For Microwave Dimming Sensor (Sensor Sold Separately)
- Operating Temp Range: -40°C/-40°F To 45°C /113°F When Fixture Is Suspended At Least 18" From Ceiling. -40°C/-40°F To 40°C /104°F When Fixture Is Surface Mounted
- IP65, NSF
- 10 Year Warranty

Applications



Parking Garages




Gas Stations

Ordering Information



SKU	Model	DLC Product ID	Voltage	Wattage	Efficacy	Lumens	CCT	Finish	Size
AA-900015UCCTW2FT	VP2FTUCCTW	S-ECM09R	AC120-347V	15/20/25W	130LM/W	2750/3300/4400LM	3500/4000/5000K	White	2FT
AA-900015UCCTW4FT2A	VP4FTUCCTW2	S-6R88V0	AC120-347V	26/35/45W	142LM/W	3640/4900/6300LM	3500/4000/5000K	White	4FT
AA-900015UCCTW4FTA	VP4FTUCCTW	S-7KMLSV	AC120-347V	34/38/45W	132LM/W	4420/4940/5850LM	3500/4000/5000K	White	4FT
AA-900015UCCTW8FT2	VP8FTUCCTW2	S-Z5X2RG	AC120-347V	65/75/90W	140LM/W	9100/10500/12870LM	3500/4000/5000K	White	8FT
AA-900015UCCTW8FTA	VP8FTUCCTW	S-680N2L	AC120-347V	65/75/90W	132LM/W	8580/9900/11880LM	3500/4000/5000K	White	8FT

Dimensions

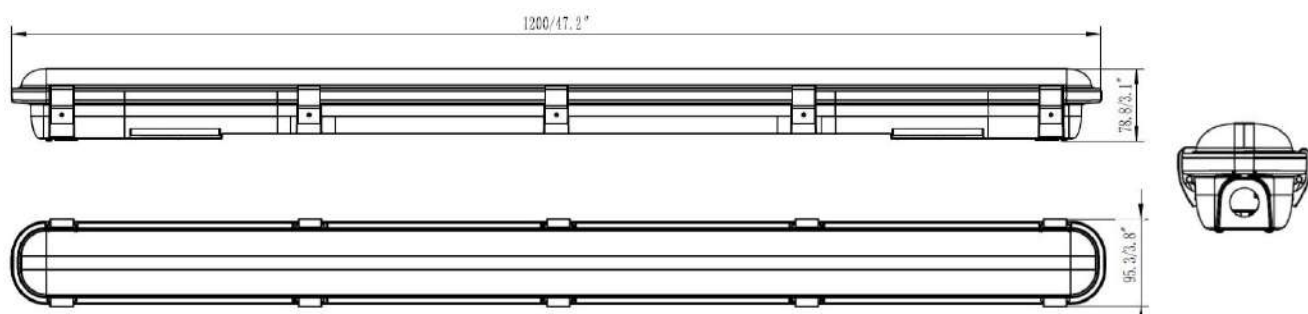

Accessories

Sold Separately



Microwave Dimming Sensor
SKU: AA-SENMW-ANT3C



PIR Bluetooth Sensor
SKU: AA-SENPBIRBT-BRI819PBDBLE



Wireless Handheld Configuration Tool
Model: RC-100