LED Panel Light 2×2 DLC 5.1 P

SKU: AA-500812UCCTW4-LB

AA LED

Description

The Elakeview LED Panel light provides high lumen efficacy and energy savings to projects requiring low ceiling applications. This panel light is an excellent energy efficient replacement for fluorescent fixtures.

Applications

- Office Buildings
- Healthcare Facilities
- Schools
- Retail Stores

Features

- AC120-347V
- Wattage Selectable: 25/30/40W
- Color Temperature Selectable: 3500/4000/5000K
- Efficacy: 114 LM/W
- CRI: >80
- 0-10V Continuous Dimming
- L70: 100,000 Hours
- Ultra-Thin, Seamless Aluminum Frame
- PMMA Non-Yellowing Frosted Lens
- DLC 5.1 Premium, CUL Listed
- 10 Year Warranty, Extended Warranty Available

Ordering Information

SKU	Model	DLC Product ID	CRI	Voltage	Wattage	Efficacy	Lumens	CCT	Finish	Size
AA-500812UCCTW4-RC-LB	PL2X2UCCTW4	S-CNKV88	>80	AC120-347V	25/30/40W	114LM/W	2750/3300/4400LM	3500/4000/5000K	White	2X2 FT
AA-500812UCCTW4-LB	PL2X2UCCTW4	S-CNKV88	>80	AC120-347V	25/30/40W	114LM/W	3125/3750/5000LM	3500/4000/5000K	White	2X2 FT
AA-500814UCCTW4-RC-LB	PL1X4UCCTW4	PLJQJD5T2GP7	>80	AC120-347V	25/30/40W	112LM/W	2750/3300/4400LM	3500/4000/5000K	White	1X4 FT
AA-500814UCCTW4-LB	PL1X4UCCTW4	S-CH7GFD	>80	AC120-347V	25/30/40W	112LM/W	3125/3750/5000LM	3500/4000/5000K	White	1X4 FT
AA-500816UCCTW4-RC-LB	PL2X4UCCTW4	S-G5XYWF	>80	AC120-347V	30/40/50W	115LM/W	3300/4400/5500LM	3500/4000/5000K	White	2X4 FT
AA-500816UCCTW4-LB	PL2X4UCCTW4	S-G5XYWF	>80	AC120-347V	30/40/50W	125LM/W	3750/5000/6250LM	3500/4000/5000K	White	2X4 FT

Dimensions

Length: 23.7" 60.2CM
Width: 23.7" 60.2CM
Depth: 1.2" 3.0CM

23.7" 602mm

23.7" 602mm

1.2" 30mm
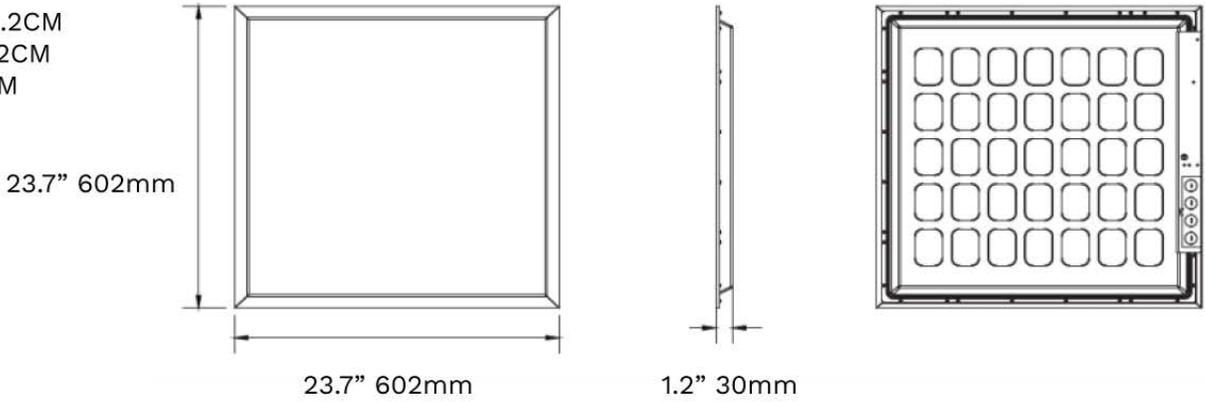
Mounting Options

Sold Separately

Suspension Kit
SKU: HangingKits

Surface Mount Kit
SKU: AA-900018-2X2-BL

Recessed Drywall Frame Kit
SKU: AA-900018-2x2-FRAME

Accessories

Sold Separately

347V Quick Connector
SKU: AA-STN58869

PIR Sensor
SKU: AA-SENPIR-ANT1P4T

PIR Sensor
SKU: AA-SENPIRBT-ANT1P4TBLE

Emergency LED Driver For Panel
SKU: AA-EmergencyLEDDriver-Panel

Remote Control
Model: RC-100