

# Elakeview Enterprise LTD



## LED Canopy 70W AC120-277V 4000K

Product description: LED Canopy 70W AC120-277V 4000K

Model Name: CP70WUNV40K

Order SKU: 700035-4K

### ◆ Features


- Energy savings up to 70% vs 150W MH
- Sealed die-casting profile for both indoor and outdoor applications
- Three ½” threaded conduit and one ¾” conduit entry points
- High quality of heat-resisting polycarbonate optical lens
- Ultra thin, low profile design



### ◆ Specifications

Rated Voltage (V)	120-277V
Rated Wattage (W)	70W
Frequency ( Hz)	50/60 Hz
Rated Input Current (mA)	0.64A Max
Power Factor	0.9
Luminous Flux (LM)	8,455.3 LM
Color Temperature	Cool Light 4000K
Color Rendering Index ( Ra)	80
Beam Angle	155C
Lamp Efficacy (LM/W)	129.56LM/W
Rated Lamp Lifetime (h)	50,000
Dimming	1-10V Dimming
Dimension (mm)	255.44*255.44*106.55
IP Rating	65
Operating Temperature	-40 to 40 degC
Material	Aluminum + PC Lens
Certificate	UL, CUL, Rohs

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

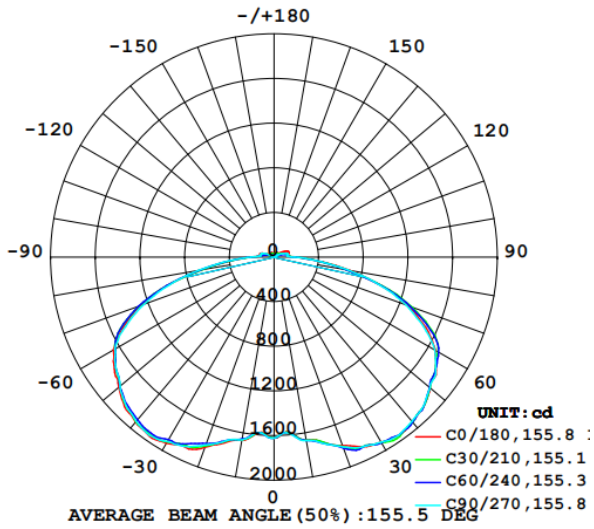

Flux out: 8129 lm

Height	Eavg, Emax	Angle: 155.64deg	Diameter
1m	116.9, 1631lx		926.73cm
2m	29.23, 407.8lx		1853.45cm
3m	12.99, 181.2lx		2780.18cm
4m	7.307, 101.9lx		3706.91cm
5m	4.676, 65.25lx		4633.63cm
6m	3.247, 45.31lx		5560.36cm
7m	2.386, 33.29lx		6487.08cm
8m	1.827, 25.49lx		7413.81cm
9m	1.443, 20.14lx		8340.54cm
10m	1.169, 16.31lx		9267.26cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

