

LED Flood Light 100W AC277-480V 4000K

SKU: AA-700013HRC-4K



Description

The Elakeview LED Flood Light developed with die-cast aluminum housing is suitable for all exterior lighting projects.



Applications



Industrial Spaces



Commercial Lighting



Arenas



Sports Fields

Features


- Input Voltage: 277-480VAC
- Power Consumption: 100W
- Power factor: >.90
- CCT: 4000K, CR >80
- L70 life: 50,000 hrs
- Beam angle: 120 degrees
- Housing material: Aluminum
- Comes with 50cm cUL listed cable
- Ingress Protection: IP65
- Warranty: 10 years

Ordering Information



SKU	Model	DLC Product ID	Voltage	Wattage	Efficacy	Lumens	CCT	Size
AA-700013RC	FL100W5K	PLK1PFVNEJ8Y	AC120-277V	100W	134LM/W	13225LM	5000K	13.2 X 23.2 X 3.1"
AA-700013HRC	FL150WH5K	PBQ5G2Z7	AC120-277V	150W	126LM/W	18750LM	5000K	13.2 X 23.2 X 3.1"
AA-700013HRC-4K	FL100WH4K	FL100WH4K	AC277-480V	100W	133LM/W	13266LM	4000K	13.2 X 23.2 X 3.1"
AA-700015HRC-4K	FL200WH4K	FL200WH4K	AC277-480V	200W	133LM/W	26672LM	4000K	13.2 X 23.2 X 3.1"
AA-700031RC	FL150W5K	FL150W5K	AC120-277V	150W	133LM/W	19847LM	5000K	13.2 X 23.2 X 3.1"
AA-700031HRC	FL150WH5K	PBQ5G2Z7	AC347-480V	150W	126LM/W	19000LM	5000K	13.2 X 23.2 X 3.1"
AA-700031RC-4K	FL150W4K	FL150W4K	AC120-277V	150W	133LM/W	19847 LM	4000K	13.2 X 23.2 X 3.1"
AA-700031HRC-4K	FL150WH4K	PL4SFUBVBE9P	AC347-480V	150W	132LM/W	19819LM	4000K	13.2 X 23.2 X 3.1"

Dimensions

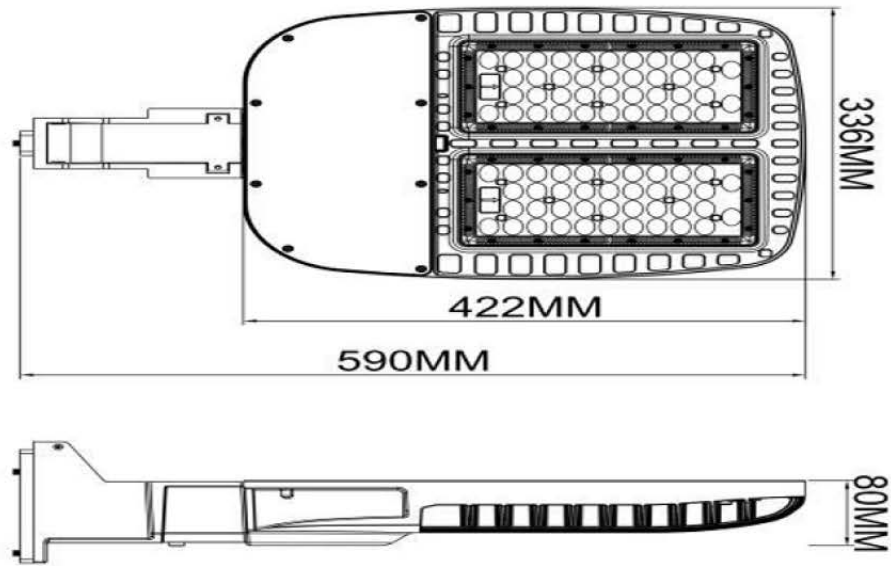

Mounting Types



Slip Fitter
SKU: AA-700046